

2XL+ Full Color Badge Printer (U2XL) Quick Start Guide

Included in the box:

- Printer
- AC Adapter
- USB Cable
- Card Output Hopper
- Card Input Hopper
- Weight Module
- Crystal Rod and Flathead Screwdriver
- User Manual



2XL+ Full Color Badge Printer (U2XL) Printer Setup for Windows

Step 1: On your PC, Download and Install the Printer Driver Package

- IMPORTANT: Do not connect the printer to your computer until prompted by the driver installer.
- Visit this link to get the driver: <https://www.idesco.com/nexus-xxl-2.0-printer.htm>
- Scroll down the page and click on “Download Driver Now” under “Windows driver”.
- Extract the compressed file folder into your desired location.
- Run the driver executable. WARNING: When the prompt to restart your computer appears, it will restart immediately when you click “OK”.
- Once the driver is installed, proceed to run the driver patch executable.

Step 2: Install the Printer Ribbon

- Open the top cover of the printer.
- Insert the ribbon ID key into ID key socket.
- Insert the ribbon into the corresponding holders (blue to blue, orange to orange).
- Use the included Crystal Rod to press the button next to the colored LED until it turns blue (if it is already blue, skip this step).
- Close the top cover.

Step 3: Load the ID Cards


- Load the ID Cards into the input hopper, face up and with the slotted side closest to the roller.
- Optional: place the plastic enclosure over the top of the input hopper.

Step 4: Configure the Driver Settings (Windows)


- Ensure that the printer driver is installed properly, and that the printer is connected to your PC with the provided USB cable.
- Click on the Start Menu on your PC, then select the gear icon above the Start Menu button, then select “Devices”.
- Click on the CIAAT CTC-940 printer.
- Next, select “Printing Preferences”.

The following window will pop up. Please match the settings shown in this screenshot and click “Apply” then “OK” at the bottom.

When using YMCKO 200 Full Color Ribbon:

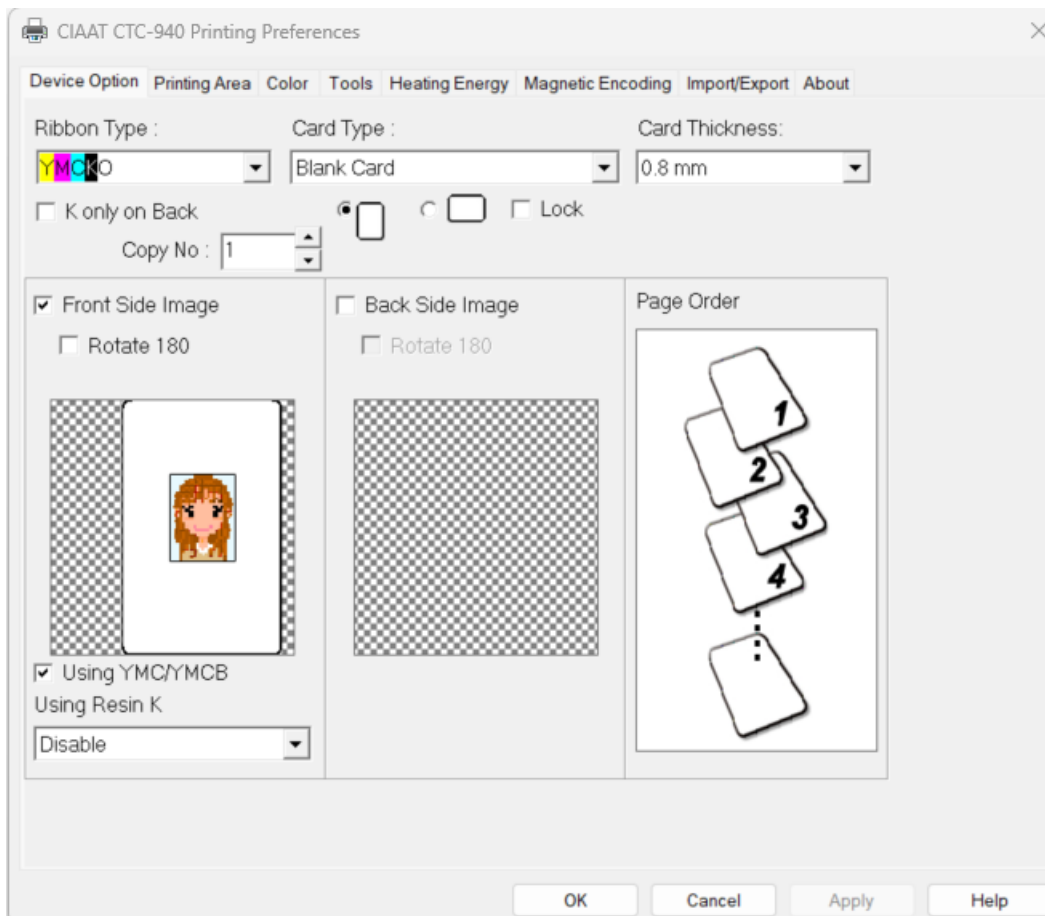

When using the K 2000 Black Ribbon:

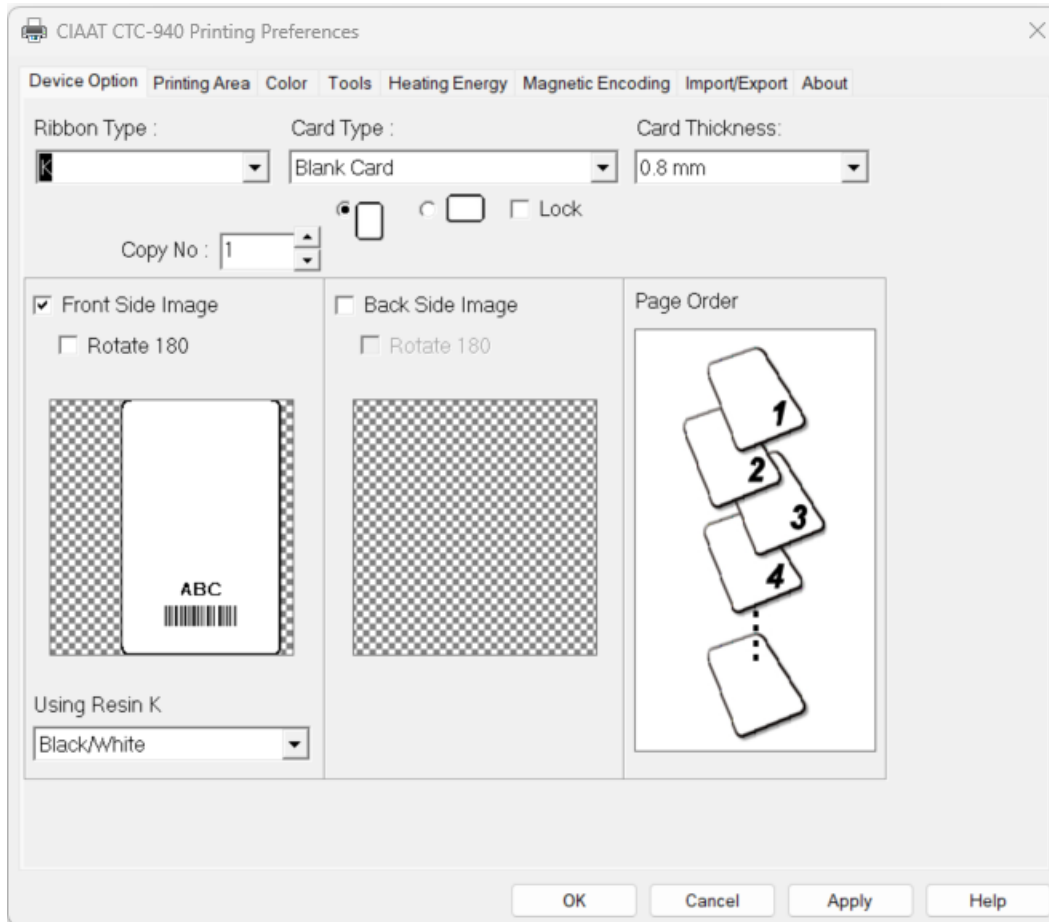

Once the driver settings are in place, you are ready to print using Microsoft Word.

2XL+ Full Color Badge Printer (U2XL) Printer Setup for Mac

Step 1: On your Mac, Download and Install the Printer Driver Package

- **IMPORTANT:** Do not connect the printer to your computer until prompted by the driver installer.
- Visit this link to get the driver: <https://www.idesco.com/nexus-xxl-2.0-printer.htm>
- Scroll down the page and click on “Download Mac Driver Now” under “Mac driver”.
- Run the driver executable.

Step 2: Install the Printer Ribbon

- Open the top cover of the printer.
- Insert the ribbon ID key into ID key socket.
- Insert the ribbon into the corresponding holders (blue to blue, orange to orange).
- Use the included Crystal Rod to press the button next to the colored LED until it turns blue (if it is already blue, skip this step).
- Close the top cover.

Step 3: Load the ID Cards


- Load the ID Cards into the input hopper, face up and with the slotted side closest to the roller.
- Optional: place the plastic enclosure over the top of the input hopper.

Step 4: Configure the Driver Settings (Mac)


- Ensure that the printer driver is installed properly, and that the printer is connected to your Mac with the provided USB cable.
- With the appropriate Microsoft Word template open, click “File” then “Print”.
- Select the CIAAT CTC-940 printer.
- Click the drop-down next to “Copies & Pages”, then select “Printer Features”.

The following window will pop up. Please match the settings shown in this screenshot and click “Print” when you are ready to print.

When using YMCKO Full Color Ribbon:

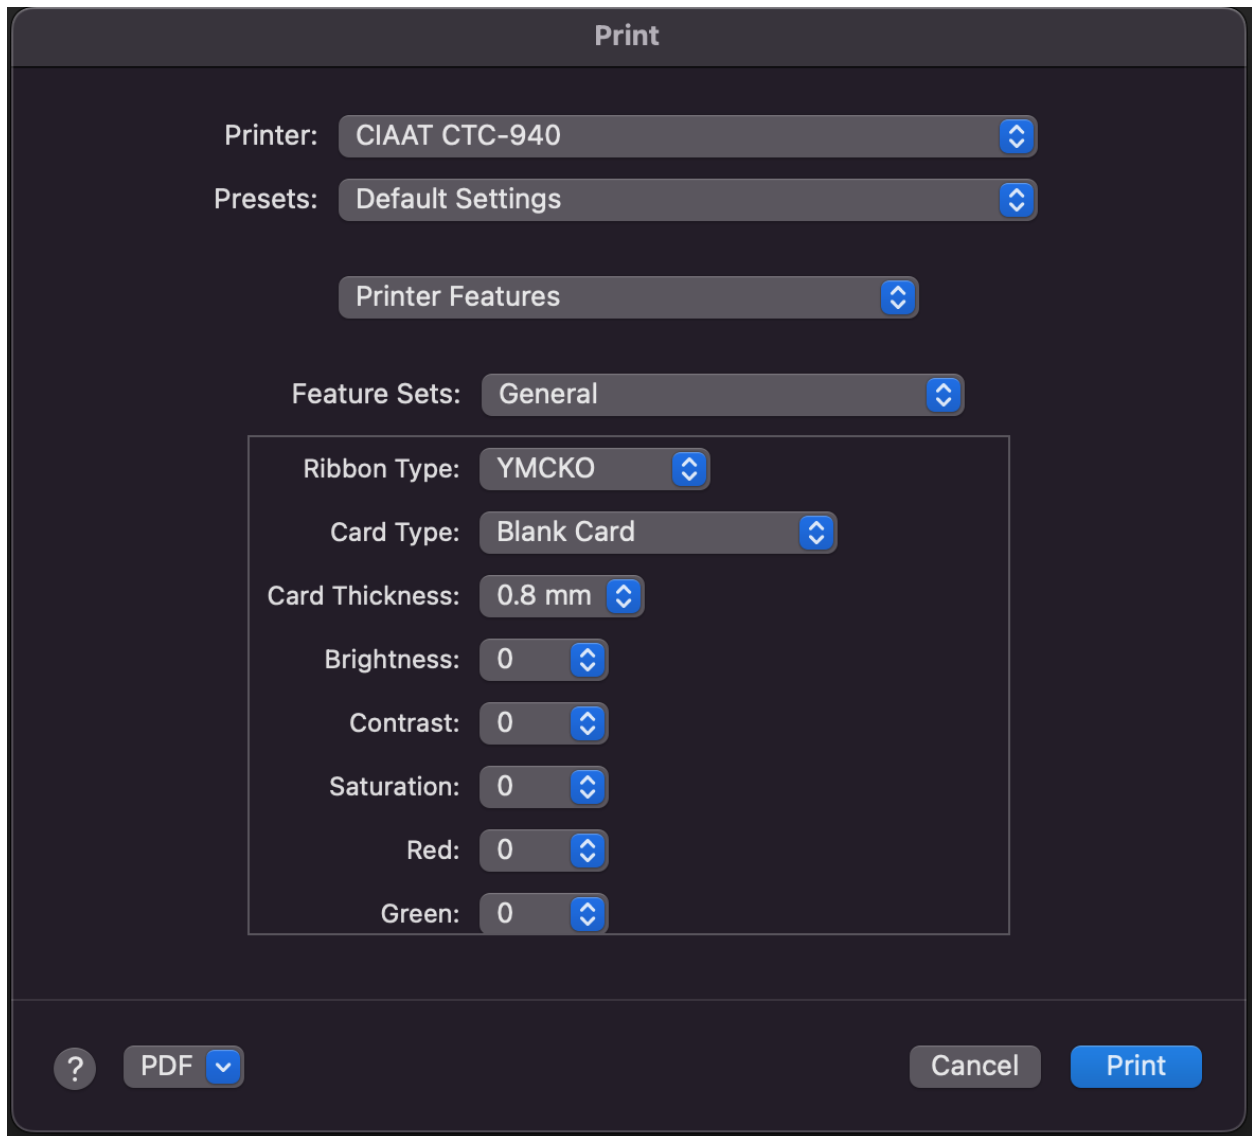

When using the K 2000 Black Ribbon:

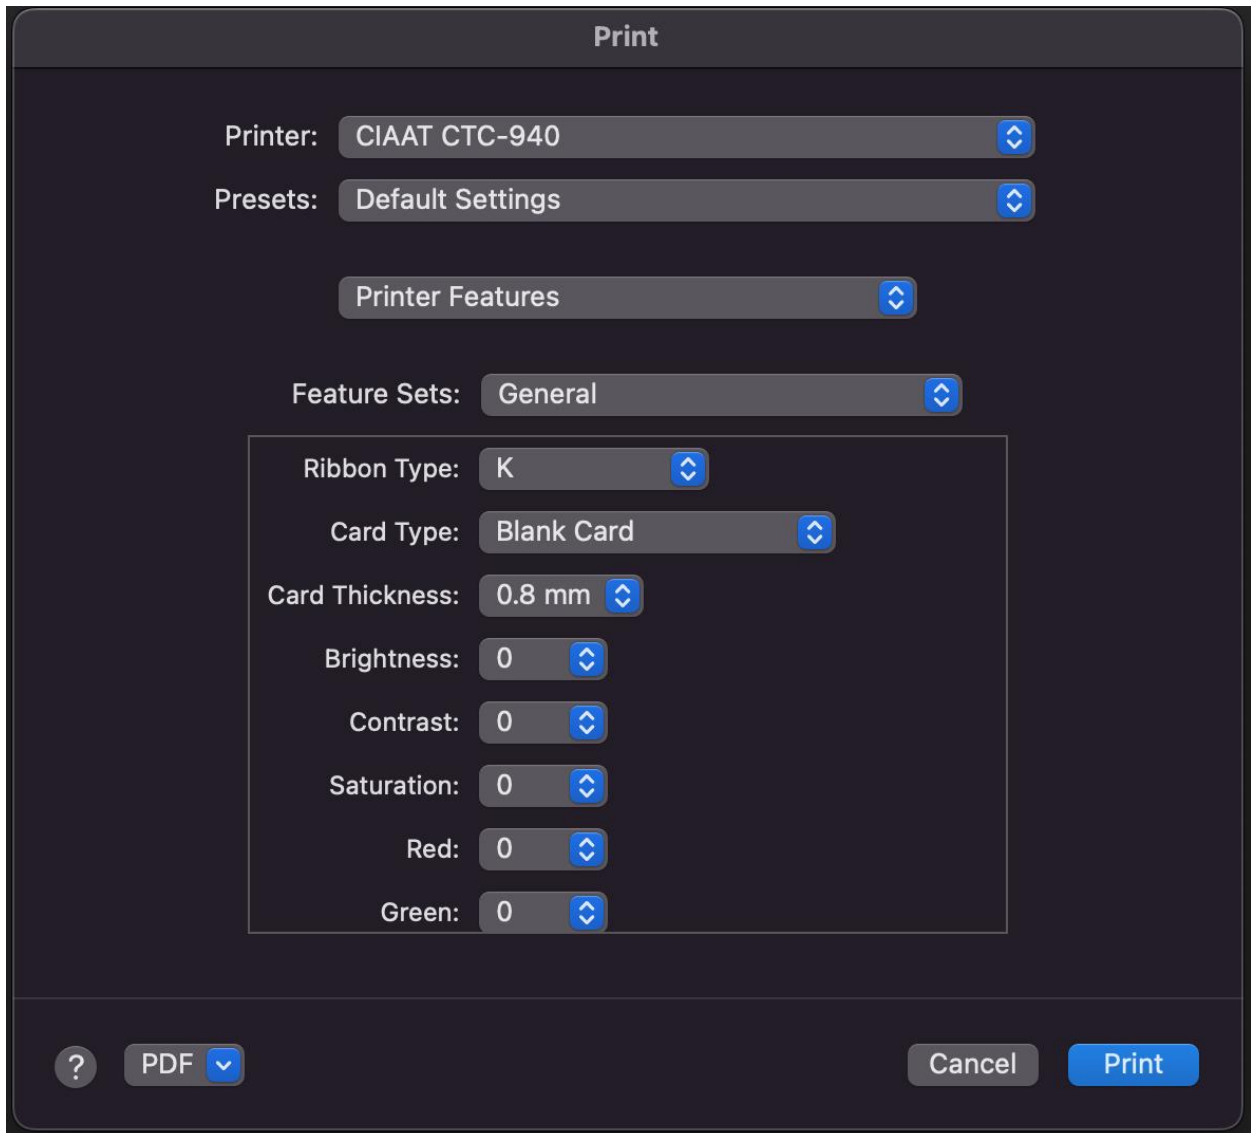

Once the driver settings are in place, you are ready to print using Microsoft Word.